

Liquidrum®

The Liquidrum® offer a **versatile and reliable solution** for a wide range of water storage needs. Whether it's for rainwater harvesting, irrigation, sanitation, or other applications, the Liquidrum® is designed to deliver **efficient performance** with **lasting durability**. Its robust construction and adaptable design make it an ideal choice.

➡ Flexibility.

Liquidrum® tanks are easy to transport, quick to install, and ideal for remote or rugged sites, with sizes to suit everything from compact setups to large-scale storage.

➡ Versatility.

Supplied as **site-assembled kit** for maximum flexibility:

- Mounted directly onto a **concrete base** — no need for steel supports or dwarf walls*.
- Lightweight components are **easy to transport and handle on-site**.
- **Straightforward installation** using basic hand tools.

➡ Economy.

Cost-effective yet durable, with **strong corrugated steel walls panels**, lightweight cover options, and suitable for both temporary and permanent use.

➡ Low maintenance & long life.

Built for **long life in tough conditions**, using corrosion-resistant high tensile zinc coated steel and flexible internal liners.

- **High-tensile steel panels** with **high-grade zinc coatings**.
- Custom-made, **prefabricated flexible membrane liners**.
- Made from inherently **corrosion-resistant materials**.



Suitable for a Wide Range of Applications

- Ideal for water storage across multiple sectors:
- Rainwater harvesting
- Fire protection and emergency reserves
- Industrial process water
- Agricultural and sports field irrigation
- General-purpose water storage

* Geotextile underlay is provided as a protective layer between the floor of the tank liner and the tank foundation.

Capacities & Size Range

Tank volumes from **1,960 to 4.5 million litres**, with diameters from **1.83 m to 40.55 m** and standard heights from **0.75 m to 4.5 m** as standard. Custom designs available for **extreme or challenging environments**.

Franklin Hodge Industries LTD Jubilee Building, Faraday Road,
Westfield Trading Estate, Hereford, HR4 9NS

01432 269 605

www.franklinhodge.com

sales@franklinhodge.co.uk



A member of the Carter Thermal Group

Liquidrum®

➡ Design.

The tank walls consist of factory pre-formed, corrugated metal sheets bolted together. Tank structure designed to BS EN 1993-4-2:2007 and according to table C.1 BS EN 1993-1-1:2005+A1:201 Liners are supplied in a range of thicknesses, to suit different applications, from 0.75mm to 2.0mm, plain and nylon reinforced form.

➡ Colour Finish.

Tanks are supplied in self-colour galvanised steel finish as a standard. Powder coating of the tank panels and covers can be provided to a wide range of standard RAL colours.

➡ Accessories.

A wide range of accessories are available, including external and internal access ladders, fittings, connections, level gauges, control switches and valves.




For more information

For more information and prices, call our sales number on: 01432 269605

Or email us on: sales@franklinhodge.com

Or visit our website on: www.franklinhodge.com

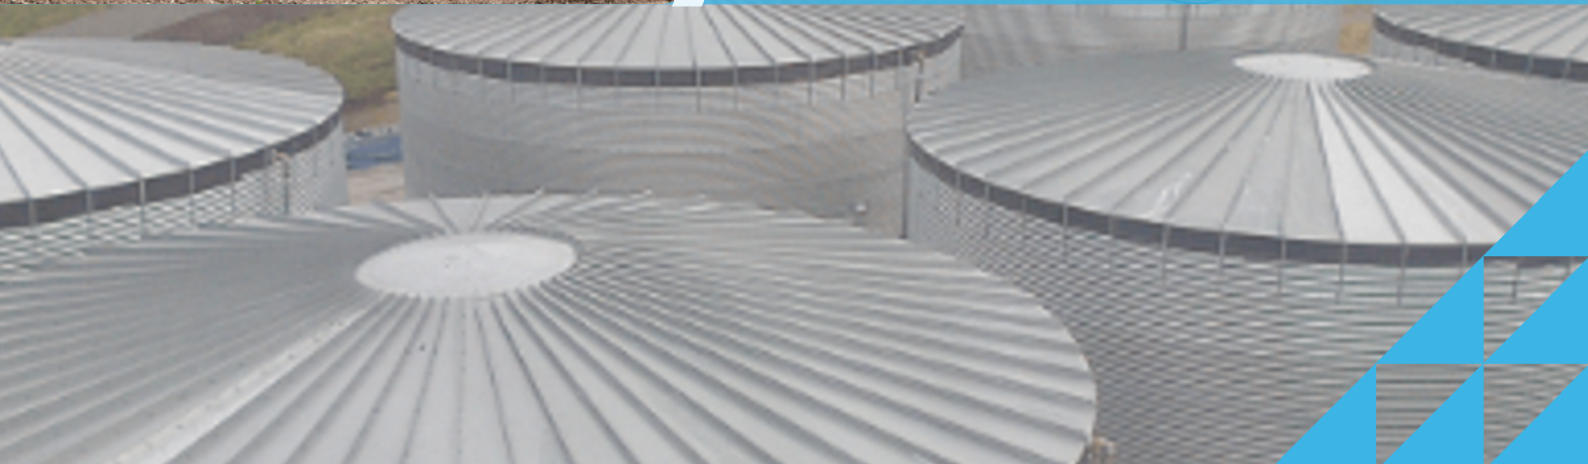

Franklin Hodge Industries LTD Jubilee Building, Faraday Road,
Westfield Trading Estate, Hereford, HR4 9NS

 01432 269 605

 www.franklinhodge.com

 sales@franklinhodge.co.uk



A member of the Carter Thermal Group